


**MMBT3904**  
**NPN TRANSISTOR**

**FEATURES**

- Complementary to MMBT3906

**PINNING**

PIN	DESCRIPTION
1	BASE
2	EMITTER
3	COLLECTOR

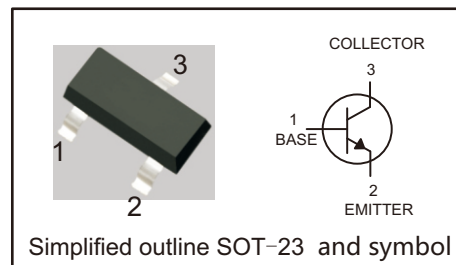

**MAXIMUM RATINGS (Ta=25°C unless otherwise noted)**









Parameter	Symbol	Value	Unit
Collector–Base Voltage	$V_{CBO}$	60	V
Collector–Emitter Voltage	$V_{CEO}$	40	V
Emitter–Base Voltage	$V_{EBO}$	6	V
Collector Current — Continuous	$I_C$	200	mA
Collector Power Dissipation	$P_C$	200	mW
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	625	°C/W
Operation Junction and Storage Temperature Range	$T_J, T_{stg}$	-55~+150	°C

**ELECTRICAL CHARACTERISTICS (TA = 25°C unless otherwise noted.)**

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 10\mu A, I_E = 0$	60			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 1\text{ mA}, I_B = 0$	40			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 10\mu A, I_C = 0$	6			V
Collector cut-off current	$I_{CEX}$	$V_{CE} = 30V, V_{EB} = 3V$			50	nA
Collector cut-off current	$I_{CBO}$	$V_{CB} = 60V, I_E = 0$			100	nA
Emitter cut-off current	$I_{EBO}$	$V_{EB} = 5V, I_C = 0$			100	nA
DC current gain	$h_{FE1}$	$V_{CE} = 1V, I_C = 10\text{mA}$	100		300	
	$h_{FE2}$	$V_{CE} = 1V, I_C = 50\text{mA}$	60			
	$h_{FE3}$	$V_{CE} = 1V, I_C = 100\text{mA}$	30			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 50\text{mA}, I_B = 5\text{mA}$			0.3	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = 50\text{mA}, I_B = 5\text{mA}$			0.95	V
Transition frequency	$f_T$	$V_{CE} = 20V, I_C = 10\text{mA}, f = 100\text{MHz}$	300			MHz
Delay time	$t_d$	$V_{CC} = 3V, V_{BE} = -0.5V$			35	ns
Rise time	$t_r$	$I_C = 10\text{mA}, I_{B1} = 1\text{mA}$			35	ns
Storage time	$t_s$	$V_{CC} = 3V, I_C = 10\text{mA}$			200	ns
Fall time	$t_f$	$I_{B1} = I_{B2} = 1\text{mA}$			50	ns




TYPICAL CHARACTERISTICS

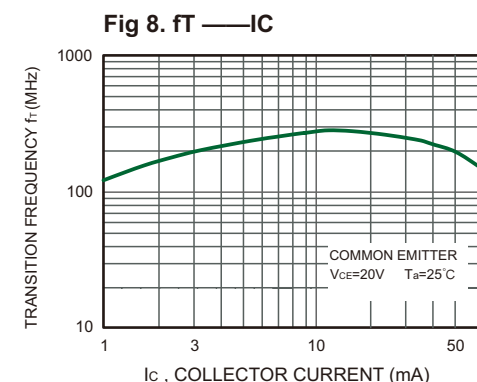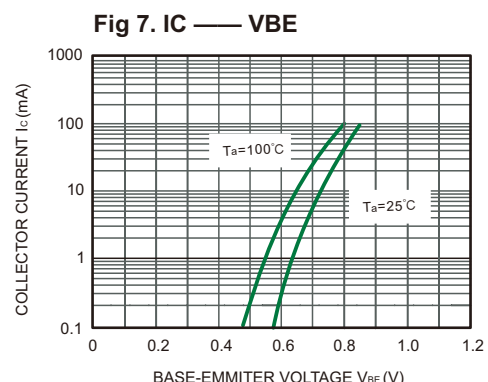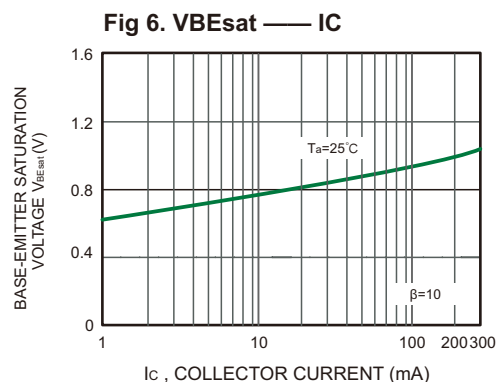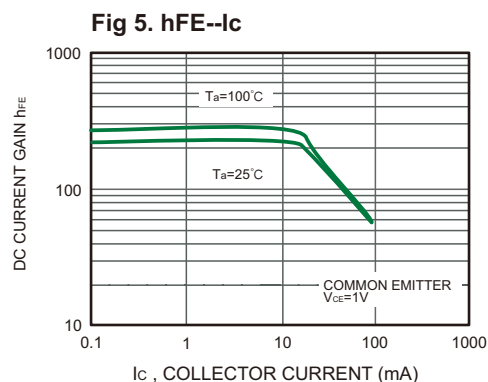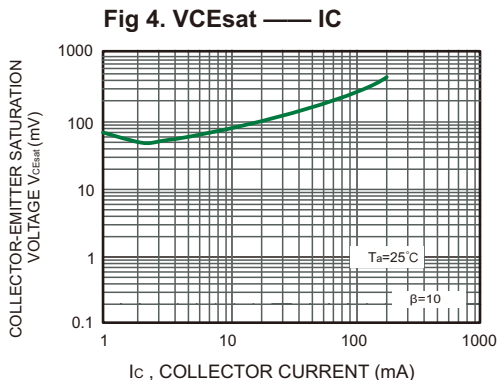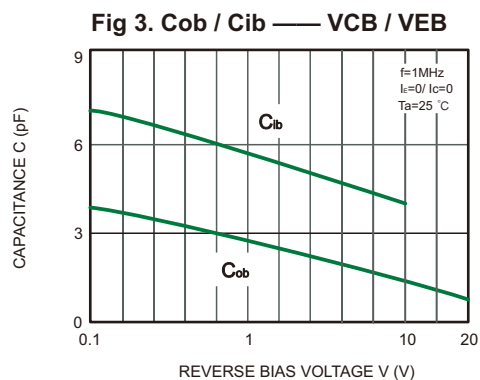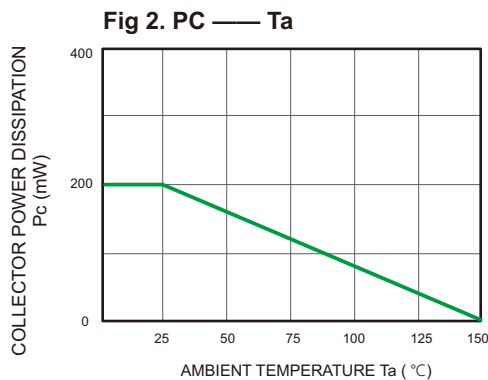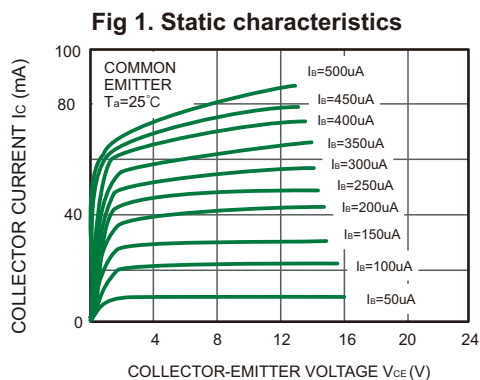




SOT-23 Package Outline Dimensions

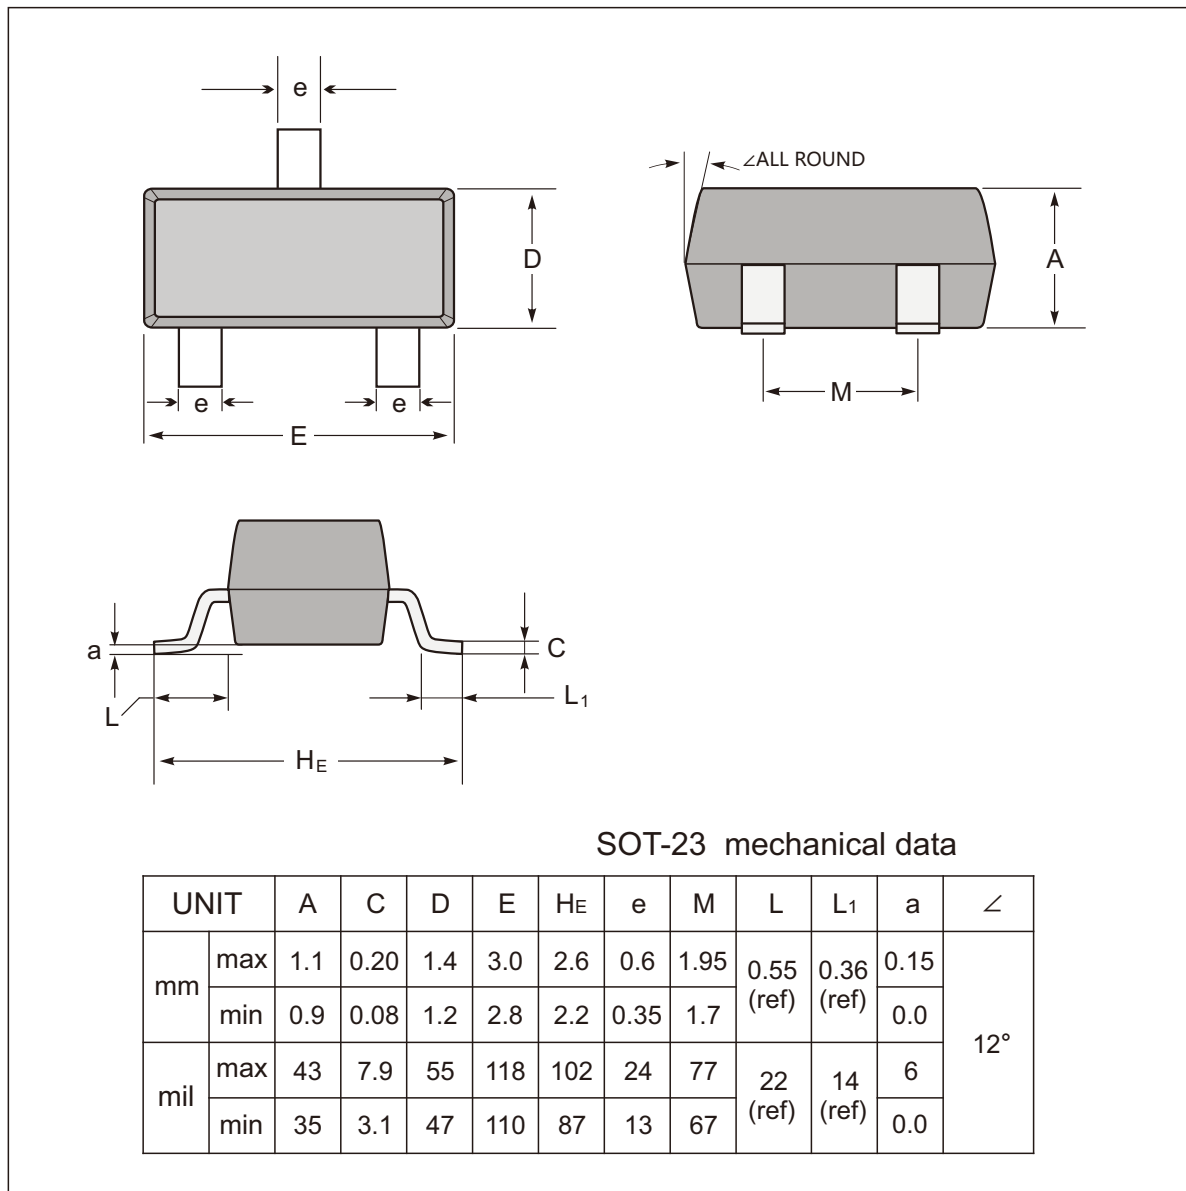

The recommended mounting pad size

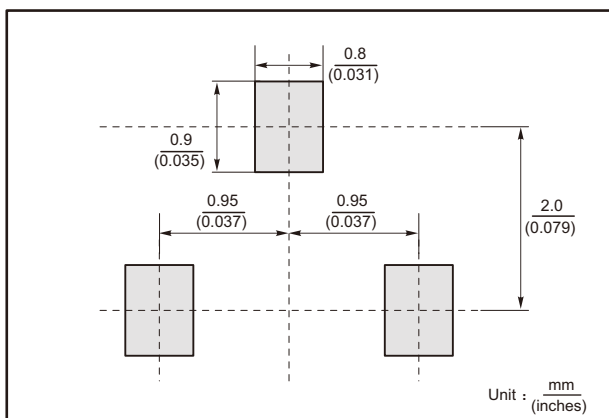

Marking

Type number	Marking code
MMBT3904	1AM



### **Important Notice and Disclaimer**

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.